





I-GROW

MANUAL

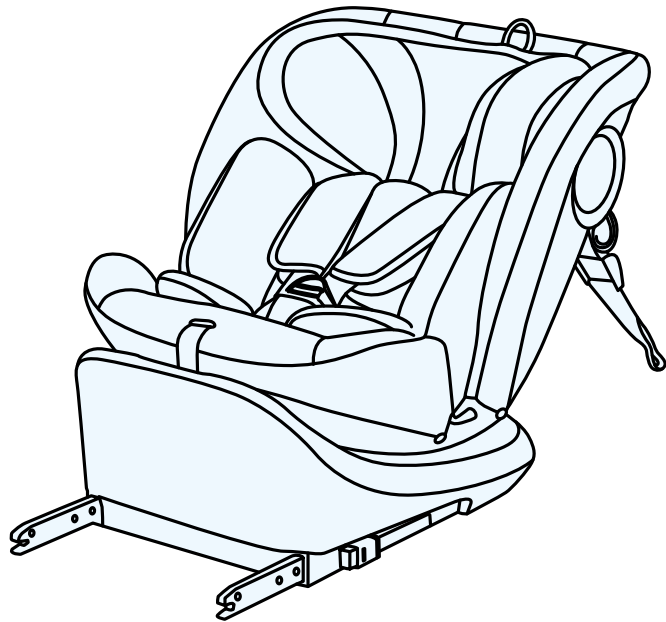

MODEL: I-GROW / I-GROW CLASSIC i-Size
ECE R129.03 v.3.1

NOTE: The product graphics are for illustrative purposes!

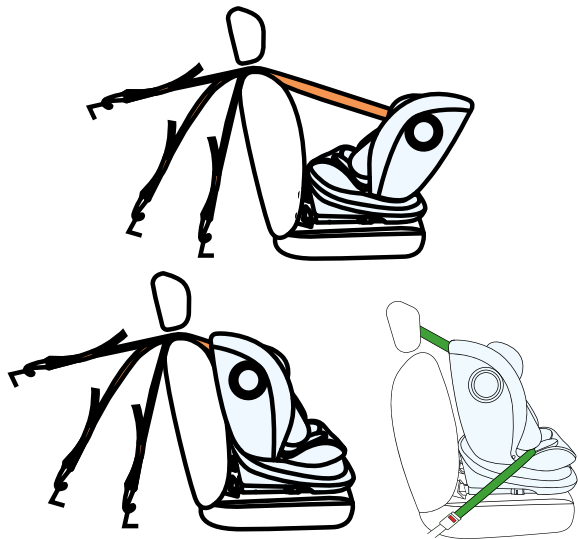

Please read the instruction manual carefully before using the car seat for the first time. It is your responsibility to ensure the safety of your child, and failure to read this manual may affect it.


1.0 General information


The car seat has been designed, tested and approved for use in accordance with the requirements of UN/ECE Regulation No. 129 concerning the approval of child restraint systems (UN/ECE R129/03).

Do not position the seat forward-facing until the child is 15 months old and 76 cm tall.

The car seat can be installed in the car in the positions indicated by the manufacturer in the vehicle manual. It is required to read the vehicle user's manual.

Please refer to the chart on the next page for correct installation instructions.

Child's height	Car seat orientation	Car seat installation
40-105 cm		ISOFIX + Top Tether + internal safety harness   
76-105 cm		ISOFIX + Top Tether + internal safety harness   
100 – 150 cm		ISOFIX + three-point car seat belt  
		three -point car seat belt 

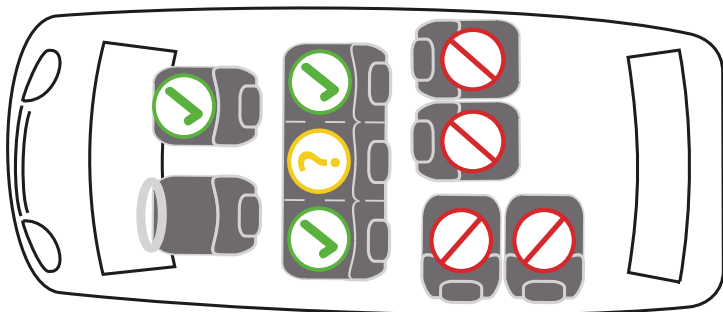

2.0 Safety Instructions

Please take a few minutes to read this instruction manual to ensure proper safety for your child.



- DO NOT install the car seat on rearward facing or side-facing seats in the vehicle.
- DO NOT place the car seat on seats equipped with an active front airbag.



- A car seat can be installed in the middle seat only if the seat is equipped with a three-point car seat belt



- If the car seat is installed in the front seat of the vehicle, the front airbag must be deactivated.
- It is recommended to install the seat only in the rear seats of the car.



WARNINGS!

Please take a few minutes to read this manual to ensure proper safety for your child. Many easily avoidable injuries are caused by careless and improper use of the seat.

! The car seat is intended for installation only on vehicle seats facing forward.

It must not be installed on vehicle seats/benches facing rearward or sideways relative to the direction of travel.

! If the car seat is installed on the front seat, the front airbag must be deactivated. It is recommended to install the seat only on the rear seats of the vehicle. Information regarding the suitability of a vehicle seat for use with a child seat can be found in the vehicle user manual.

! Ensure that the internal harness securing the child is properly adjusted to the child's body and is not twisted. For this reason, the child should not wear thick clothing under the harness.

! The lap belts must run as low as possible across the child's pelvis to ensure optimal protection in the event of an accident.

! The car seat must not be used without the cover.

! It is recommended to keep this instruction manual for the entire period of use of the seat.

! Do not use replacement covers other than those recommended by the manufacturer, as they are an integral part of the seat's safety system.

! Do not use any attachment points other than those described in the manual and marked on the seat.

! DO NOT use any other attachment points than those described in the instruction manual and marked on the car seat.

! All rigid elements and plastic parts of the child seat must be positioned and installed so that, under normal vehicle operating conditions, they cannot become trapped by a moving seat or a vehicle door.

! Regularly check the technical condition of the seat, paying particular attention to attachment points, seams, and adjustment elements. Ensure that all mechanical components are fully functional. Never lubricate or oil any parts of the child seat.

! Discontinue use of the seat if any parts are damaged or have become loose.

! The car seat must be replaced if it has been subjected to violent loads during a road accident.

! No modifications may be made to the car seat without approval from the appropriate homologation authority. Failure to install the seat in accordance with the manufacturer's instructions may endanger life and health.

! Protect the child seat from direct sunlight, as heated components may cause burns to your child. Protect both the child and the seat from sunlight.

! Never leave your child unattended in the seat.

! Ensure that luggage and other items are properly secured, especially on the rear shelf, as they may cause injury in the event of a collision.


! In the event of an emergency, it is important to quickly release the safety harness. This means that the harness release button is not fully secured—ensure that your child does not play with the harness.

! Set a good example for your child and always fasten your seat belt. An unbelted adult can also pose a danger to the child.

! Before every journey, make sure the car seat is correctly installed.

! The car seat must be secured even when not in use. An unsecured seat can cause injury to passengers even during sudden braking.

! In some vehicles with delicate upholstery, the use of child seats may leave marks and/or cause discoloration. To prevent this, a blanket, towel, or similar item can be placed under the car seat.

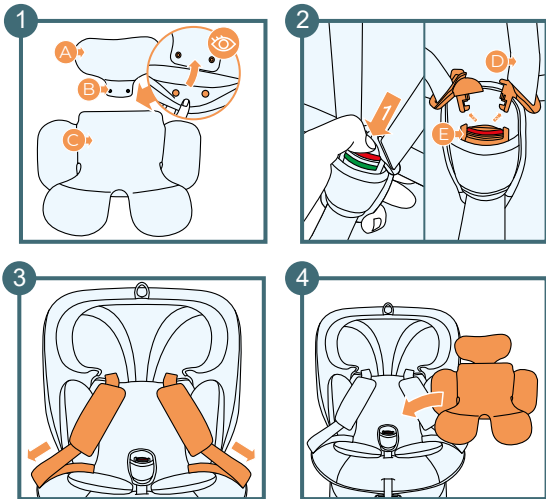


- A: Headrest part of the insert**
- B: Fasteners**
- C: Insert**
- D: Internal safety harness**
- E: Internal safety harness buckle**

3.0 Securing the child

3.1 Installing the insert

Use the additional insert until the child reaches 76 cm.

1. Connect the headrest part of the insert to the rest of the insert with the fasteners
2. Detach the safety harness
3. Move the seat belt to the sides of the car seat
4. Put the insert in place

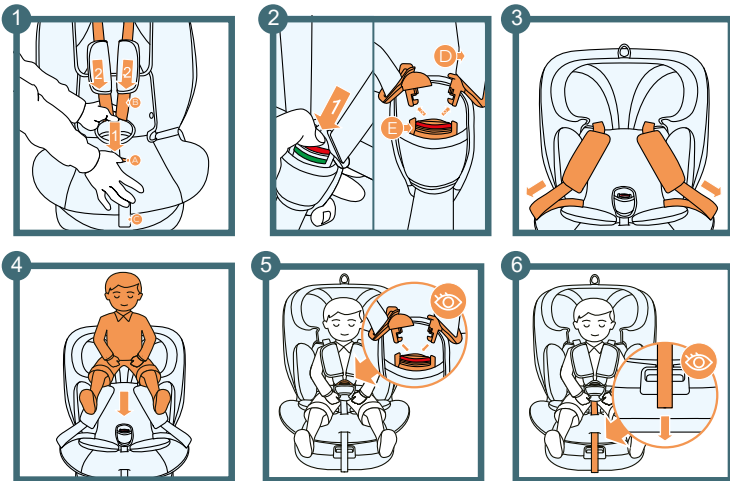


- A: Safety harness adjustment button**
- B: Safety harness**
- C: Safety harness adjuster strap**
- D: Safety harness**
- E: Safety harness buckle**




3.2 Adjusting the safety harness

1. Press the safety harness adjustment button while simultaneously pulling the safety harness to the limit. **Remember: do not pull the shoulder pads.**
2. Unbuckle the safety harness
3. Move the safety harness to the sides of the car seat
4. Place the child in the car seat
5. Fasten the safety harness
6. Adjust the safety harness to the child by pulling the safety harness adjuster strap

Adjust the height of the shoulder safety harness – it should enter the backrest flat, horizontally, just above the child's shoulders.

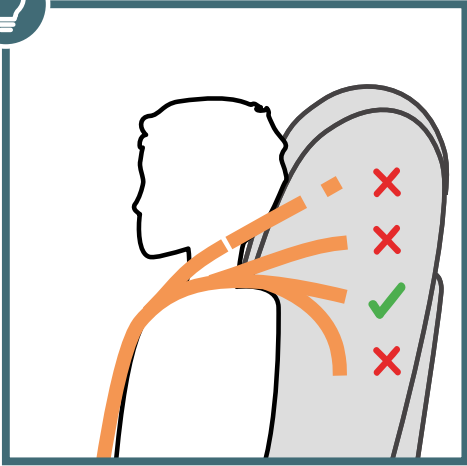

The appropriate height of the shoulder straps should be set so that the belt enters the backrest of the seat flat, horizontally just above the child's shoulders.



A: headrest height adjuster strap
B: headrest




3.3 Headrest height

1. Loosen the harness straps all the way down by pressing the button and pulling the harness straps. Remember! Do not pull on the shoulder pads.
2. Grasp the headrest height adjustment strap, which is located on the top of the headrest, and pull it up gently. Adjust the headrest by selecting one of the nine options; when the height is adjusted, let go of the adjustment strap.

IMPORTANT: Make sure the seat headrest is locked in place.



The headrest should be adjusted to the child's head well, the lower part of the headrest should be positioned at the child's shoulder height.



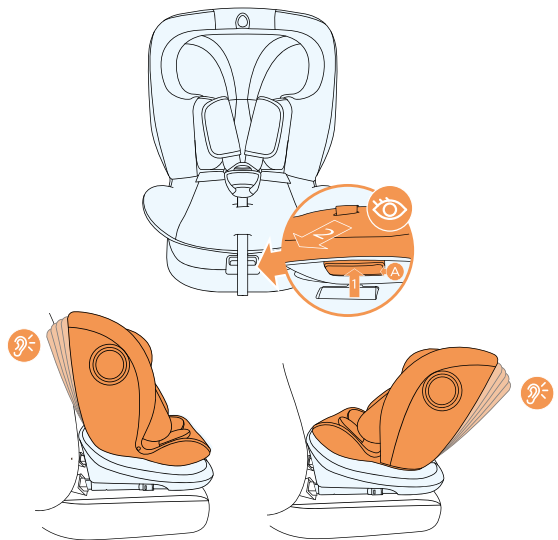


A: Backrest angle of incline adjustment lever

3.4 Backrest angle of incline adjustment mechanism

1. Pull the backrest angle of incline adjustment lever
2. Adjust the seat angle of incline
3. Release the lever in the required position (one of five available options)
4. Move the seat slightly until you hear a distinct "click" sound

NOTE: In the later stages of installation, remember to loosen the TT strap before adjusting the backrest angle of incline.



A: car seat easy spin lever






3.5 Easy spin mechanism

Easy spin mechanism is a function that helps you comfortably place or remove your child from the car seat.

1. Pull the car seat easy spin lever
2. Rotate the car seat to the side of your choice.
3. You will hear a "click" indicating that the car seat is locked in the selected position
4. Place your child in the car seat and secure the child with the safety harness



Pay attention to the audible sound of the rotation lock




- A: Safety harness adjustment button
- B: Safety harness
- C: Safety harness adjuster strap
- D: Safety harness
- E: Safety harness buckle


3.6 Securing the child with the internal safety harness

1. Loosen the safety harness fully by pressing the button and pulling the harness straps. **Remember: do not pull the shoulder pads.**
2. Unfasten the buckle
3. Place the safety harness on the sides of the car seat
4. Place the child in the car seat
5. Adjust the headrest to the child's height
6. Fold the two buckle latches together to interlock and insert them into the buckle until you hear a "click"




Make sure that the straps are tightened so that there is no more than 1cm of slack between them and the child.



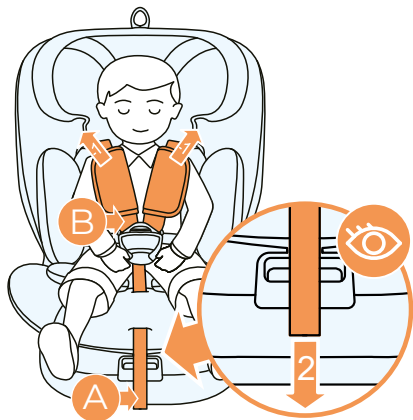


A: Safety harness adjuster strap
B: Internal safety harness



3.7 Tightening the safety harness

1. Pull the internal safety harness to eliminate the clearance in the waist section, the safety harness should lie flat.
2. Tighten the safety harness with the adjuster strap until the safety harness lies flat on the child's body.

IMPORTANT! Make sure the safety harness is not twisted.

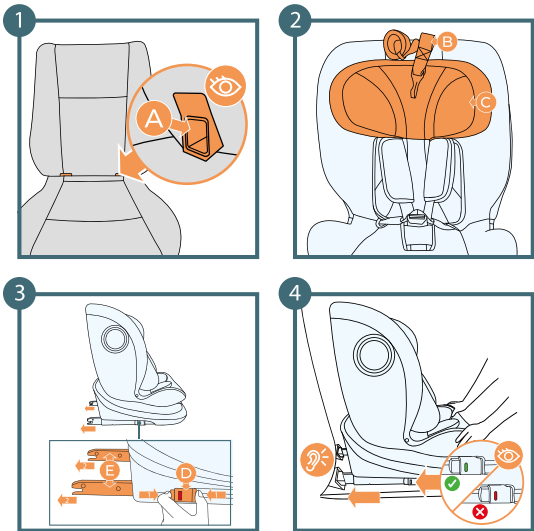

A: ISOFIX arms/connectors of the car seat

B: Top Tether strap

C: Head restraint

D: ISOFIX release button

E: ISOFIX latches

4.0 Installation in the vehicle



4.1 Installation using the ISOFIX system

1. Attach the ISOFIX pads to the seat connectors in the vehicle.
2. Place the Top Tether strap on the headrest and do not block access to it at a later stage of the car seat installation.
3. Press both sides of the ISOFIX release button and extend the ISOFIX connector arms to their maximum length.
4. Grasp the car seat with two hands and slide both latches into the car seat mountings. When you hear the "click" of each ISOFIX latches, push the car seat against the backrest by applying firm, even pressure on both sides.



Pay attention to the sound of ISOFIX connectors snapping and grasp the car seat and check if it is securely fastened and if it is not too loose. If it moves and the ISOFIX latches slip out, repeat the previous steps.

NOTE: The locking latches are only properly attached when both button indicators are completely green.

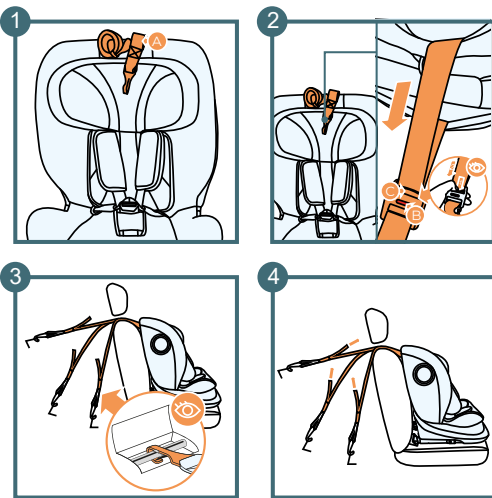


- A:** Top Tether strap
B: Correct installation indicator of the strap
C: Buckle release button


4.2 Installing the "Top Tether"

1. Pull out the Top Tether strap
2. Press the buckle release button to loosen it (the length of the strap must allow the hook to be placed to the installation point located at the rear of the vehicle seat or in the trunk).
3. Attach the mounting hook of the strap to the vehicle's attachment point (it is necessary to refer to the vehicle's manual).
4. Pull the mounting strap by the other end to tighten it.

IMPORTANT: The Top Tether strap must not pass over the vehicle's headrest. It should pass under the headrest - if this is not possible, remove the headrest (check whether this is allowed according to the vehicle's manual).

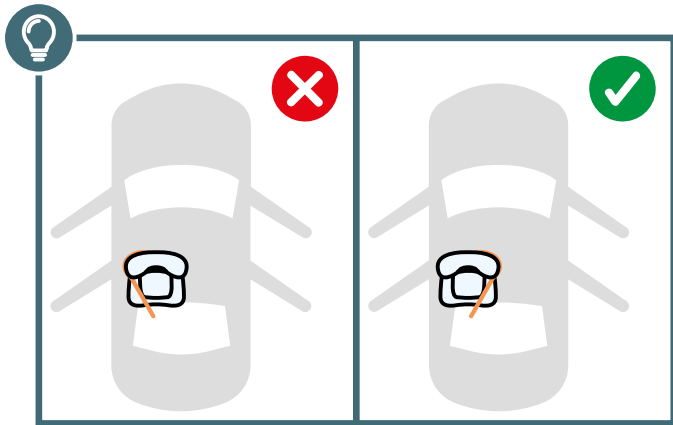

REMARK! To use the I-GROW rotation system, the Top Tether belt must be mounted on the inside of the vehicle (opposite side from the door)





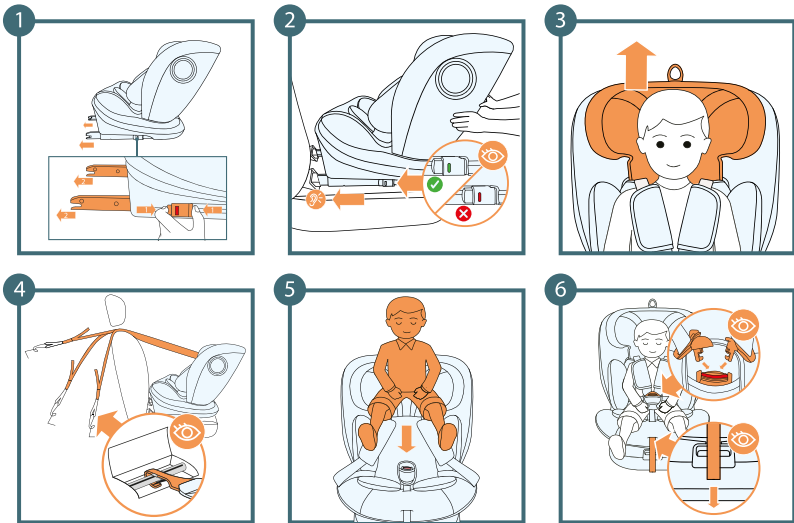


4.3 Rearward facing car seat installation

4.3.1 Children between 40 and 105 cm in height using the ISOFIX system and the Top Tether.







1. Install the car seat on the seat using the ISOFIX connectors rearward-facing (if the car seat is already installed using the ISOFIX connectors, change its position using the easy spin mechanism).
2. Push the car seat as far as possible into the seat and check its correct installation - the correct installation indicators should turn green.
3. Adjust the headrest to the child's height.
4. Secure the car seat with the Top Tether strap.
5. Place the child in the car seat.
6. Secure the child with the internal safety harness

IMPORTANT: If the child has already reached 76 cm, remove the insert before placing the child in the car seat. (See section 4.1)

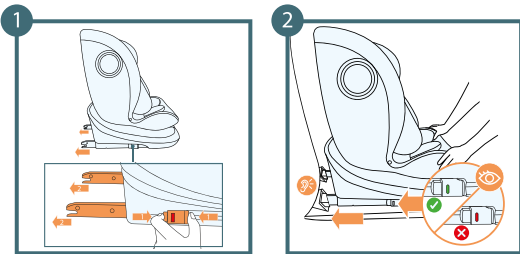

4.3.2 Forward facing installation of the car seat for children between 76 and 105 cm in height using the ISOFIX system and the Top Tether.

1. Install the car seat forward-facing using the ISOFIX connectors. If the car seat is already installed using the ISOFIX connectors, change its position to forward-facing using the easy spin mechanism.
2. Push the car seat as far as possible to the seat of the vehicle and check its installation - the correct installation indicators should turn green.
3. Secure the car seat with the Top Tether strap.
4. Adjust the headrest to the child's height.
5. Place the child in the car seat.
6. Secure the child with the internal safety harness

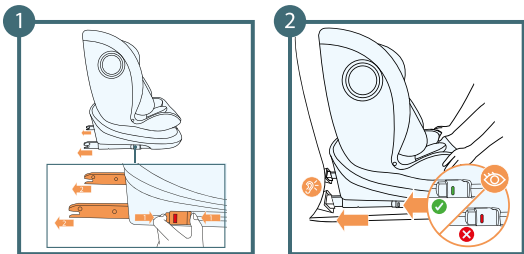

4.3.3 Forward facing installation of the car seat for children between 100 and 150 cm in height using the three-point car seat belts and ISOFIX connectors.

1. Install the car seat forward-facing on the seat of the vehicle using the ISOFIX connectors.
2. Push the car seat as far as possible to the seat of the vehicle and check its installation - the correct installation indicators should turn green.
3. Unfasten the fasteners and uncover the car seat backrest
4. Open the car seat cover and fasten the internal safety harness inside the car seat.
5. Place the child in the car seat
6. Adjust the headrest to his/her height.


7



A: Shoulder belt guide


B: Waist belt guide

8



7. Guide the shoulder belt through the green shoulder belt guide.

8. Guide the car seat belt through both waist belt guides. Fasten the car seat belt. You will hear a characteristic "click".

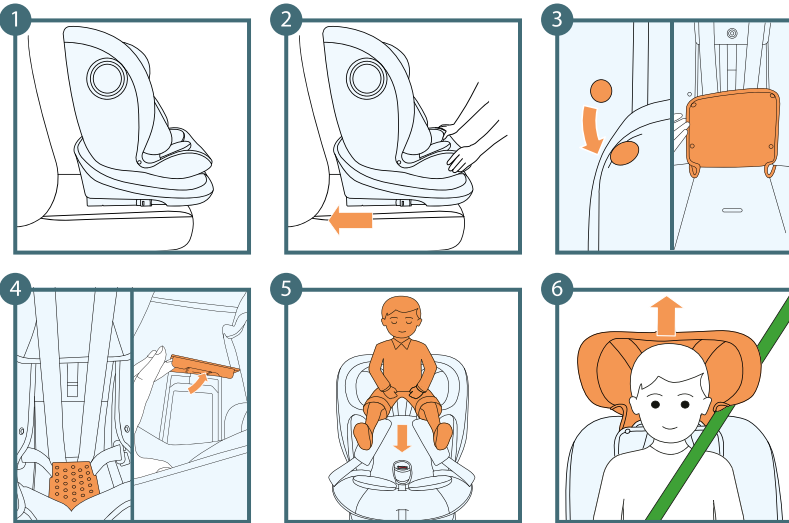

4.3.4 Forward facing installation of the car seat for children between 100 and 150 cm in height using the three-point car seat belts.

1. Install the car seat forward-facing on the seat of the vehicle Push the seat as far as possible into the seat.
3. Unhook the fasteners and open the backrest of the seat
4. Unfasten the fasteners and uncover the car seat backrest
5. Place your child in the seat
6. Adjust the head restraint to his/her height.


7



A: Shoulder belt guide


B: Waist belt guide

8

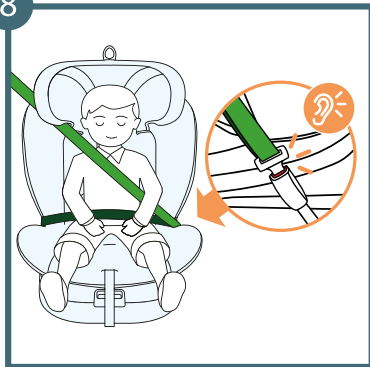

7. Guide the shoulder belt through the green shoulder belt guide.

8. Guide the car seat belt through both waist belt guides. Fasten the car seat belt. You will hear a characteristic "click".

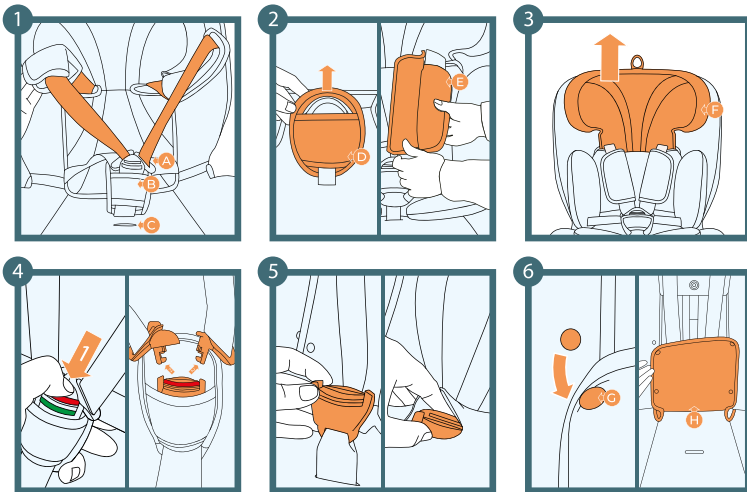


- A:** Internal safety harness
- B:** Internal safety harness buckle
- C:** Internal safety harness adjustment button
- D:** Buckle pad
- E:** Shoulder pad

- F:** Headrest
- G:** Fasteners
- G:** Back part of the cover
- H:** Back part of the cover

5.0 Stowing away the five-point safety harness


1. Loosen the safety harness fully by pressing the button and pulling the safety harness. **Remember: do not pull the shoulder pads.**
2. Remove the shoulder pads and buckle pad by unfastening the fasteners located on the sides.
3. Place the headrest in the highest position
4. Unfasten the buckle
5. Put the buckle through the opening in the cover
6. Unfasten the fasteners and uncover the backrest of the car seat

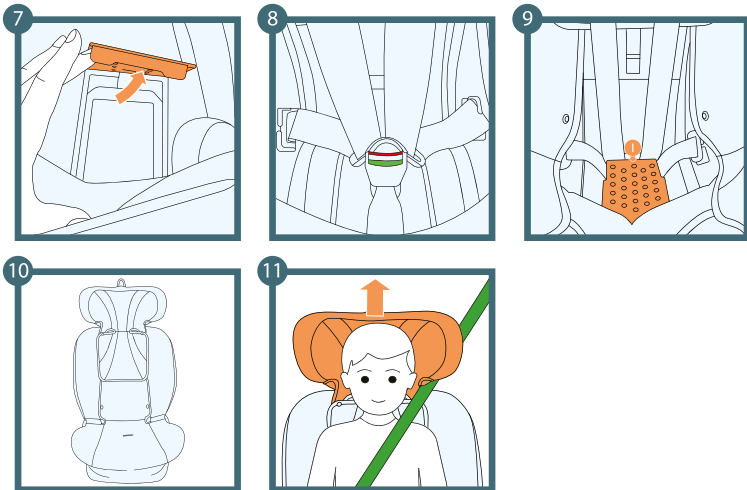

i: Storage cover


7. Open the storage cover
8. Fasten the five-point safety harness
9. Put the fastened safety harness into the storage compartment so that it lies flat along the backrest
10. Put the cover back on the car seat using the fasteners on the edges of the fabric.
11. Adjust the headrest to the child's height.

6.0 Removing the car seat (ISOFIX system)

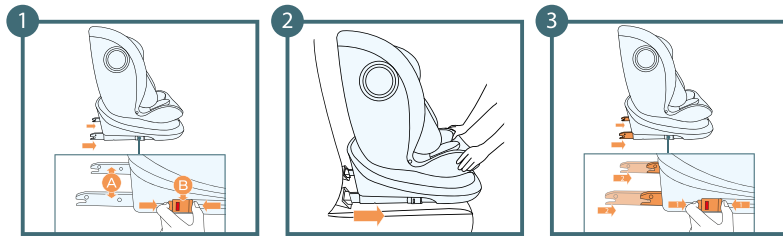

A: ISOFIX guides
B: ISOFIX release button

- 1 Press the ISOFIX release buttons on both arms of the ISOFIX connector at the same time (the colour of the indicators should turn red)
2. Slide the car seat out of the ISOFIX guides.
3. Slide the ISOFIX arms back into the car seat base

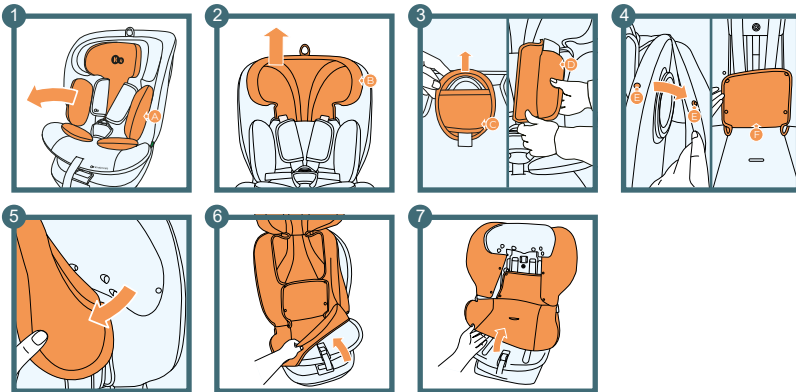

- A: Insert**
- B: Headrest**
- C: Buckle pad**
- D: Shoulder pad**
- E: Fasteners**
- F: Front part of the car seat backrest cover**
- G: Side protection**

6.1 Removing the cover

1. Remove the insert
2. Move the headrest to the highest position
3. Remove the shoulder pads and buckle pad
4. Unfasten the four fasteners securing the cover to the front part of the car seat backrest and the fasteners on the sides of the car seat
5. Remove the fabric from the headrest by pulling it slightly from the side
6. Remove the cover from the front part of the seat by gently pulling the material on both sides.
7. Remove the fabric from the car seat by putting it over the headrest

6.2 Installation of the cover

To reinstall the cover, simply reverse the above sequence of steps. Adjust the cover to the installation points on the car seat. Start by installing the cover on the car seat shell and finally on the headrest section.

7.0 Cleaning

NOTE: Do not use the car seat without the cover.

- The cover can be removed and washed using mild powder and delicate wash cycle (30°C).
- Follow the washing instructions on the cover label. Colours may fade if washed at temperatures above 30°C.
- Do not spin or tumble dry the cover (the layers of material may split).
- Prolonged sun exposure of the cover is prohibited.
- Plastic parts can be cleaned with soapy water.
- Do not use aggressive cleaning agents (such as solvents).
- The safety harness can be cleaned in lukewarm soapy water.

Warning! Metal snaps should never be removed from the safety harness.

Full Warranty Terms and Conditions are available at
WWW.KINDERKRAFT.COM



(AR) بضمان مصلحة عملائنا . نحن في خدمتكم! إذا كانت لديكم أي مشكلة مع المنتج الذي حصلتم عليه، فيجربى الاتصال بنا بالطريقة التي تفضلونها!

(CS) V zájmu péče o naše klienty - jsme rádi k dispozici! Pokud jste se setkali s nějakým problémem v souvislosti s obdrženým výrobkem, kontaktujte nás způsobem, který vám nejvíce vyhovuje!

(DE) In Sorge für unsere Kunden - stehen wir gerne zu Ihrer Verfügung! Wenn Sie auf ein Problem mit dem erhaltenen Produkt treffen, treten Sie bitte mit uns in Kontakt in der bequemsten Weise für Sie!

(EN) In the interests of our Clients - we are at your disposal! If you have a problem with the product you received, contact us in the most convenient way for you!

(ES) ¡Por el bien de nuestros clientes, estamos a su disposición! ¡Si tiene cualquier problema con el producto recibido, póngase en contacto con nosotros de forma más cómoda para usted!

(FR) Dans l'intérêt de nos clients - nous sommes à votre disposition! Si vous avez un problème avec le produit que vous avez reçu, Contactez-nous de la manière la plus pratique pour vous!

(HU) Bármikor állunk az ügyfeleink rendelkezésére! Ha az átvett termékkel kapcsolatban valamilyen problémába ütközött, az Onnek legmegfelelőbb módon vegye fel velünk a kapcsolatot!

(IT) Prendersi cura dei nostri Clienti - siamo alla Vostra disposizione! Se hai incontrato un problema con il prodotto che hai ricevuto. Contattaci nel modo piu conveniente per te!

(NL) In het belang van onze klanten - staan wij ter beschikking! Als u een probleem met het ontvangen product tegenkomt, neemt contact met ons op via de manier die u het makkelijkste vindt!

(PL) W trosce o naszych Klientów - jesteśmy do dyspozycji! Jeśli napotkałeś problem dotyczący otrzymanego produktu, skontaktuj się z nami w najbardziej dogodny dla Ciebie sposób!

(PT) Para o conforto dos nossos Clientes - estamos sempre à sua disposição! Se tiver qualquer problema com o nosso produto, entre em contacto conosco de modo mais confortável para si!

(RO) In interesul clienților noștri - suntem la dispoziția dumneavoastră! Dacă aveți o problema cu produsul pe care l-ați primit, contactați-ne în modul cel mai convenabil pentru dvs.!

(RU) заботясь о наших клиентах, мы находимся в вашем распоряжении. Если вы столкнулись с проблемой, связанной с полученными продукто, свяжитесь с нами наиболее удобным для вас способ!

(SK) Náš zákazník je pre nás dôležitý - sme vám k dispozícii! Ak máte akýkoľvek problém súvisiaci s doručeným produktom, kontaktujte nás spôsobom, ktorý vám najviac vyhovuje!

(SV) I våra kunders intresse - vi står till ditt förfogande! Om du har problem med den produkt du fick, kontakta oss på det mest praktiska sättet för dig!

International contact:
help@kinderkraft.com
(0044) 7441 476675



kinderkraftofficial



kinderkraft



kinderkraftofficial

منتج/VÝROBCE/HERSTELLER/MANUFACTURER/FABRICANTE/FABRICANT/
GYARTÓ/FABBRICANTE/FABRIKANT/PRODUCENT/FABRICANTE/PRODUCĂTOR/
ПРОИЗВОДИТЕЛЬ/VÝROBCA/TILLVERKARE:

**4Kraft Sp. z o.o. ul. Tatrzńska 1/5
60-413 Poznań, Poland**